


CLAD-BOY®

The battery-powered vacuum lifter for handling roof and wall elements outdoors on the building site

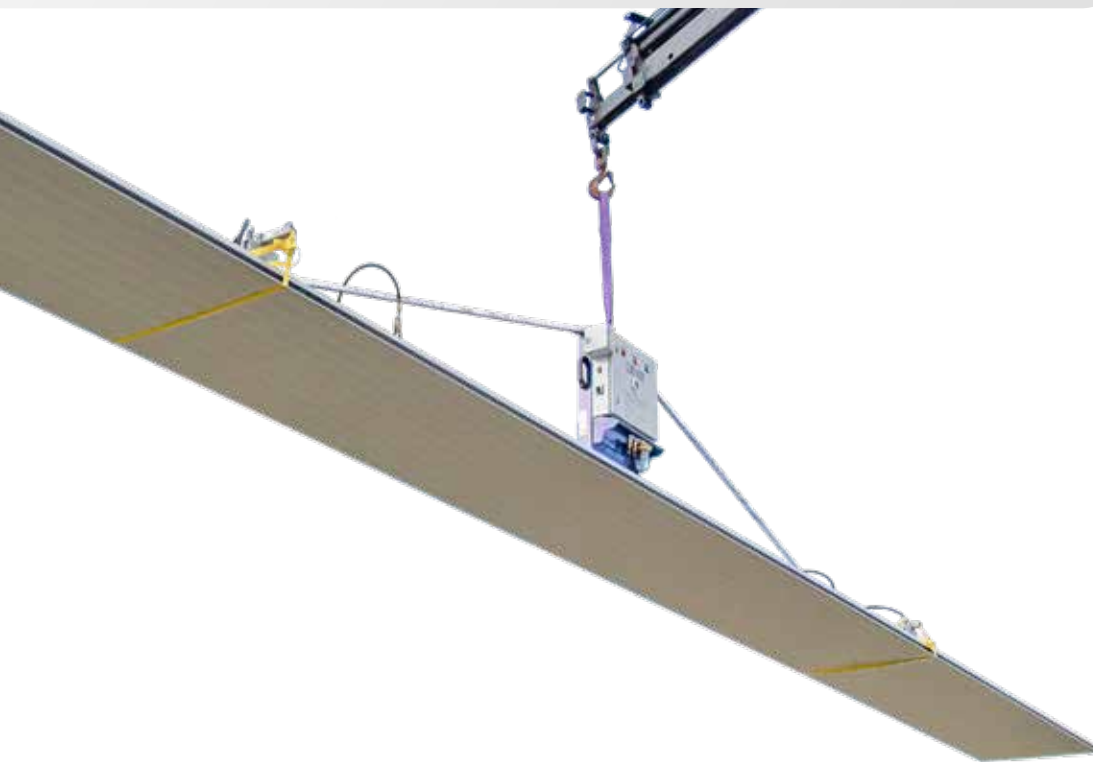

Overview CLAD-BOY®

- Vacuum lifter for the transport of various roof and wall panels and trapezoidal sheet metal
- Load capacity roof mounting: 300 kg, up to 18 m length
- Load capacity wall mounting: 240 kg, up to 14 m length
- Flexible use due to infinitely variable swivel unit 0-90° with locking device



The safe companion for your construction site

Transport with the **CLAD-BOY®** is damage-free and gentle on the material, even for goods with particularly high-quality surfaces.

The **CLAD-BOY®** is ready for use even at 60 % vacuum utilization. The safety belts, the warning lights and the acoustic warning, activating when the vacuum level is too low, ensure a maximum of safety.

Sensitive components of the **CLAD-BOY®** are protected from the weather, so that it can also be used in humid weather. The suction plates are UV-resistant and elastic at sub-zero temperatures.



The **CLAD-BOY®** can be transported by its transport cradle **STORE-BOY** in a flexible and easy way.

The device's compact compilation fits on the loading area of a van and thus saves transport costs in the long run.



More information, videos and application reports at www.clad-boy.de.



Type	Item number	Load capacity (kg) horizontal	Load capacity (kg) vertical	max. panel length (m)	Suction plates number and type
ROOF, roof angle max. 25°					
CLAD-BOY 160/4L-24V/WS 3 m	1010261	240	-	12	4 x AL 80x400L
CLAD-BOY 160/4L-24V/WS 4 m	1010263	240	-	14	4 x AL 80x400L
CLAD-BOY 160/4L-24V/WS 8 m	1010265	240	-	18	4 x AL 80x400L
CLAD-BOY 160/6L-24V/WS 3 m	1010262	300	-	12	6 x AL 80x400L
CLAD-BOY 160/6L-24V/WS 4 m	1010264	300	-	14	6 x AL 80x400L
CLAD-BOY 160/6L-24V/WS 8 m	1010266	300	-	18	6 x AL 80x400L
WALL					
CLAD-BOY 160/4L-24V/WS 90° Basic unit	1010241	-	160	12	4 x AL 80x400L
CLAD-BOY 160/4L-24V/WS 3m 90° Suction plates vertical	1010243	-	160	12	4 x AL 80x400L
CLAD-BOY 160/4L-24V/WS 3m 90° Suction plates horizontal	1010247	160	-	12	4 x AL 80x400L
CLAD-BOY 160/4L-24V/WS 4m 90° Suction plates vertical	1010245	-	160	14	4 x AL 80x400L
CLAD-BOY 160/4L-24V/WS 4m 90° Suction plates horizontal	1010248	160	-	14	4 x AL 80x400L
CLAD-BOY 160/6L-24V/WS 90° Basic unit	1010242	-	240	12	6 x AL 80x400L
CLAD-BOY 160/6L-24V/WS 3m 90° Suction plates vertical	1010244	240	-	12	6 x AL 80x400L
CLAD-BOY 160/6L-24V/WS 3m 90° Suction plates horizontal	1010255	-	240	12	6 x AL 80x400L
CLAD-BOY 160/6L-24V/WS 4m 90° Suction plates vertical	1010246	240	-	14	6 x AL 80x400L
CLAD-BOY 160/6L-24V/WS 4m 90° Suction plates horizontal	1010256	240	-	14	6 x AL 80x400L

Data, information (in particular also information on load-bearing capacity), illustrations, descriptions and dimensions are non-binding and serve only as illustrations. They have been checked with the utmost care. However, we do not accept any liability for incorrect or incomplete information, errors or misprints. We reserve the right to make changes. Production and material-related dimensional deviations are reserved. Status: November 2020 No. 2082880 / 02.

AERO-LIFT Vakuumtechnik GmbH

Turmstr. 1
D-72351 Geislingen-Binsdorf

Fon: +49 (0) 74 28 / 94 514 - 0
Fax: +49 (0) 74 28 / 94 514 - 38

info@aero-lift.de
www.aero-lift.de/en

**LIFTING
FIXING MOVING**
VACUUM LIFTING TECHNOLOGY